

# **REEDFAX®**

THE PATENT CONNECTION

 A member of the Reed Elsevier plc group

REEDFAX Document Delivery System  
275 Gibraltar Road • Horsham, PA 19044 • USA  
Voice 1.800.422.1337 or 1.215.441.4768  
FAX 1.800.421.5585 or 1.215.441.5463

## **Our services include:**

- U.S. Patents from #1 to current week of issue
- Design and Plant Patents
- Reissue Patents and Re-exam Certificates
- U.S., EP and Canadian File Histories/Wrappers
- Non-US Patents including European and World
- Trademarks and Trademark File Histories
- An Automated System that operates in 15 min. 24 hrs./day, 365 days/yr.
- Dedicated Customer Service Staff

**TO REPORT TROUBLE WITH THIS TRANSMISSION or for REEDFAX CUSTOMER SERVICE, CALL 1.800.422.1337. ONCE CONNECTED, IMMEDIATELY PRESS "0" (ZERO) FOR OPERATOR.**

---

**TO: Tom Parker**

---

**Foreign Patent**  
**Company Number:** 1311  
**Account Number:** 942680  
**Client Reference:** 104021  
  
**Date:** 11/3/1999  
  
**Control Number:** 37743  
  
**Patent Number:** AU 592229  
  
**Pages:** 17  
  
**REEDFAX Code:** FP-Prt-Cour-Lib  
**Request Number:** 4

**Order Number:** 131604

### **CHARGES FOR THIS PATENT:**

Basic Charge:	\$	16.00
Extra Pages:	\$	0.00
Special Serv:	\$	0.00
Surcharge:	\$	0.00

---

**Total: \$ 16.00**

---

Discount D6

Charges listed are for **informational purposes** only and do not include applicable tax, other adjustments or shipping charges.

\*\*\*\* < THIS IS NOT A BILL > \*\*\*\*

(NON-CONVENTION—One or More Persons)

FORM 7—REGULATION 12 (1)

COMMONWEALTH OF AUSTRALIA

PATENTS ACT, 1952-1969

DECLARATION IN SUPPORT OF AN  
APPLICATION FOR A PATENT

FEE STAMPS

(a) Here insert (in full) Name of Applicant(s)

In support of the Application made by <sup>(a)</sup>  
MICHAEL JOHN COTTERILL

for a patent for an invention entitled:

(b) Here insert Title of Invention.

(b) "KEYBOARD SUPPORT APPARATUS"

I/We, <sup>(a)</sup> MICHAEL JOHN COTTERILL

(c) Here insert (in full) Address(es).

of <sup>(c)</sup> 43 Rocklea Crescent, Sylvania Heights, New  
South Wales 2224

do solemnly and sincerely declare as follows:

1. I am/~~we~~ are the Applicant(s) for the Patent.

2. I am/~~we~~ am/~~we~~ are the actual Inventor(s) of the invention (or, where a person other than the Inventor is the Applicant).

2. <sup>(a)</sup>

(d) Here insert full Name(s) and Address(es) of Actual Inventor(s) if other than Applicant(s).

\_\_\_\_\_ is/are  
the actual Inventor(s) of the invention and the facts upon which I am/we are entitled to make the Application are as follows:

~~I am/We are the Assignee(s) of the said Inventor(s).~~

DECLARED at Sydney  
this 22ND day of FEBRUARY 1989  
<sup>(a)</sup> Michael John Cotterill

(e) Signature(s) of Applicant(s).

TO THE COMMISSIONER OF PATENTS.

SHELSTON WATERS

PATENT ATTORNEYS  
55 CLARENCE STREET, SYDNEY  
AUSTRALIA

SV19

---

(12) PATENT ABRIDGMENT (11) Document No. AU-B-79179/87  
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 592229

---

(54) Title  
KEYBOARD SUPPORT APPARATUS

International Patent Classification(s)  
(51)<sup>4</sup> A47B 021/03

(21) Application No. : 79179/87 (22) Application Date : 27.08.87

(87) WIPO Number : WO88/01481

(30) Priority Data

(31) Number	(32) Date	(33) Country
PH7833	04.09.86	AU AUSTRALIA
PH8957	14.11.86	AU AUSTRALIA

(43) Publication Date : 24.03.88

(44) Publication Date of Accepted Application : 04.01.90

(71) Applicant(s)  
MICHAEL JOHN COTTERILL

(72) Inventor(s)  
MICHAEL JOHN COTTERILL

(74) Attorney or Agent  
SHELSTON WATERS

(56) Prior Art Documents  
US 4625657  
US 3866866  
US 1662675

(57) Claim

5. (amended) A keyboard support apparatus comprising:  
a first bracket and a second bracket interconnected  
by first, second and third elongate members; said first  
and second elongate members are pivotally attached by  
means of a first pivot pin to said first bracket; said  
first elongate member is also pivotally attached by  
means of a second pivot pin to said second bracket; said  
third elongate member is pivotally attached by means of  
a third pivot pin to said first bracket; said second and  
third elongate members are adapted to co-operate with a  
fourth pivot pin associated with said second bracket,  
and said fourth pivot pin is adapted to releasably

(11) AU-B-79179/87  
(10) 592229


-2-

engage said second and third elongate members; the arrangement being such that, in use, one of the first and second brackets is connected to a supporting surface and the other to a keyboard, and the elongate members, when released from engagement with the second bracket, are moveable substantially in the same plane.


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

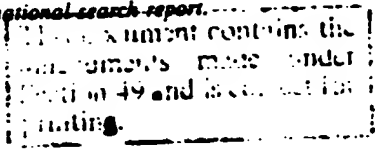(51) International Patent Classification <sup>4</sup> :  A47B 21/03	A1	(11) International Publication Number: WO 88/01481 (43) International Publication Date: 10 March 1988 (10.03.88)
(21) International Application Number: PCT/AU87/00289 (22) International Filing Date: 27 August 1987 (27.08.87) (31) Priority Application Numbers: PH 7833 PH 8957 (32) Priority Dates: 4 September 1986 (04.09.86) 14 November 1986 (14.11.86) (33) Priority Country: AU (71)(72) Applicant and Inventor: COTTERILL, Michael, John [AU/AU]; 43 Rocklea Crescent, Sylvania Heights, NSW 2224 (AU). (74) Agent: SHELSTON WATERS; 55 Clarence Street, Sydney, NSW 2000 (AU).	(81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US. Published With international search report.  A.D.J.P. 28 APR 1988 <div data-bbox="1182 814 1474 982" style="border: 1px solid black; padding: 5px; text-align: center;">           AUSTRALIAN            24 MAR 1988            PATENT OFFICE         </div>	

(54) Title: KEYBOARD SUPPORT APPARATUS

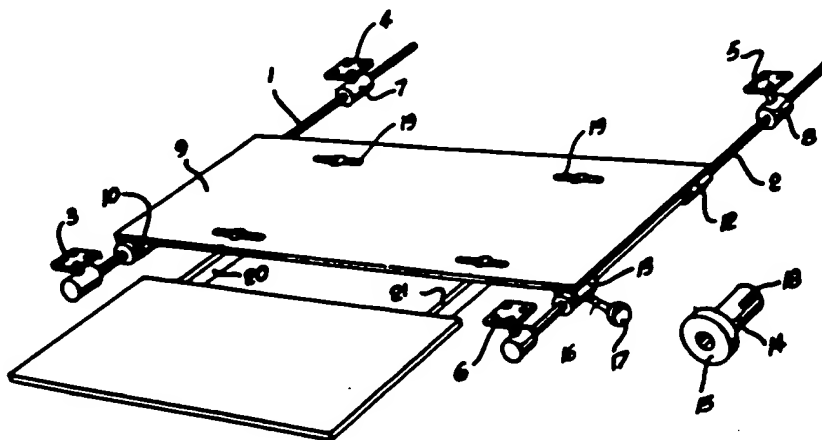

## (57) Abstract

A keyboard support apparatus includes two substantially rigid parallel rods (1 and 2). Each of the rods has a first respective bracket (3 and 6) at one end. Each rod is also slidably connected to a second respective bracket (4 and 5). Also the rods are interconnected via keyboard mounting body (9) which makes a slidable connection with each rod. A manually operable screw (16) fits into a threaded hole in the mounting body (9) and may be adjusted to bear against one of the rods (1 or 2) and thereby prevent the mounting body (9) from sliding along the rods (1 and 2). A keyboard or a keyboard shelf is mounted in front of the keyboard mounting body (9) by means of a further structure which connects the underside of the keyboard or shelf to the underside of the mounting body (9). When the support apparatus is screwed to the underside of the desk the keyboard may be slid under the desk or pulled out in front of the desk. A preferred structure for mounting the keyboard onto the keyboard mounting body is also described.

- 2 -

optimum working position.

Disclosure of Invention

According to the invention there is provided a keyboard support apparatus comprising:

a first bracket and a second bracket interconnected by first, second and third elongate members; said first and second elongate members are pivotally attached by means of a first pivot pin to said first bracket; said first elongate member is also pivotally attached by means of a second pivot pin to said second bracket; said third elongate member is pivotally attached by means of a third pivot pin to said first bracket; said second and third elongate members are adapted to co-operate with a fourth pivot pin associated with said second bracket, and said fourth pivot pin is adapted to releasably engage said second and third elongate members; the arrangement being such that, in use, one of the first and second brackets is connected to a supporting surface and the other to a keyboard and the elongate members, when released from engagement with the second bracket, are moveable substantially in the same plane.

Brief Description of Drawings

A preferred embodiment will now be described by way of example only with reference to the accompanying drawings in which:



1. THE SHEET

RECEIVED - 8 JUN 1988

- 3 -

Figure 1 (deleted);

Figure 2 (deleted);

Figure 3 shows a perspective view of keyboard support apparatus embodying the invention;

Figure 4 shows a detail of part of the keyboard support apparatus shown in Figure 3;

Figure 5 shows a side view of the keyboard support apparatus shown in Figure 3 at one extreme of its travel; and

Figure 6 shows a side view of the keyboard support apparatus shown in Figure 3 at the other extreme of its travel.

Best Mode for Carrying out Invention

Referring now to figures 3-6 keyboard attaching bracket 22 to which a keyboard or shelf may be bolted, is connected to keyboard mounting block attaching bracket 23 by means of two parallel elongate members 24 and 25. Elongate member 24 is attached to bracket 23 by means of pivot pin 27, and attached to bracket 22 by means of pivot pin 26. Elongate member 25 is attached to bracket 23 by means of pivot pin 28, and is attached to bracket 22 by means of pivot pin 29 which resides in longitudinal slot 30 of elongate member 25.

A third elongate member 31 interconnects brackets 22 and 23. Elongate member 31 is attached to bracket 23

- 4 -

by means of pivot pin 27 and is attached to bracket 22 by means of pivot pin 29 which engages in longitudinal slot 32 of member 31.

Bracket 22 is connected at one side of the underside of a keyboard, and bracket 23 is connected at one side of the underside of keyboard mounting body 9 (for instance by bolts which pass through holes in the overhang 35 of bracket 25 and through the holes or slots 19 of mounting body 9). Further brackets 33 and 34 are connected to the other sides of the keyboard and mounting body in order to prevent rotation of the keyboard with respect to the mounting body. Brackets 33 and 34 are interconnected by a further elongate member 35 which is pivotally attached at either end by means of pivot pins 36 and 37 respectively. An alternative arrangement would be to connect brackets 22 and 23 at the centres of the keyboard and keyboard mounting body, in which case brackets 33 and 34 could be dispensed with.

A cross member 38 provides the final degree of stability to the structure.

A comparison of Figures 5 and 6 will indicate that only a limited amount of pivotal movement is possible by elongate members 24 and 25 around pivot pins 27 and 28. The precise amount of movement permitted is determined by the length of the slot 30. In Figure 6 it can be





- 5 -

seen that bracket 22 may be tilted in a clockwise direction about pivot 26 an amount determined by the length of either slot 30 or slot 32.

It should be appreciated that rotation is possible by any desired amount between the two extreme positions shown in Figures 5 and 6 respectively. Also, at any intermediate position between the two extremes shown some degree of tilt is possible.

Pivot pin 29 is essentially a threaded bolt, that is at least some part of the pin which extends beyond the surface of elongate member 25 is threaded. A nut, preferably turnable by hand, may be tightened or loosened on the threaded portion of pivot pin 29 in order to clamp or release elongate members 25 and 31, and bracket 22. This is illustrated in greater detail in Figure 4. It is an advantage of this arrangement that the structure may be adjusted to desired angle and tilt with one hand.

To facilitate operation and to counteract the weight of the keyboard a spring 39 may be provided connecting the elongate member 25 and bracket 22. Spring 39 comes under greater tension when bracket 22 is moved downwards with respect to bracket 23. That is when the arms of the spring are compressed together. This has the effect of returning the desktop to the



- 6 -

horizontal.

A further spring 40, for instance a coil spring, may connect an overhang 35 of bracket 23 to elongate member 25. This spring also comes under greater tension when bracket 22 is moved downwards with respect to bracket 23. The action of the spring therefore serves to return bracket 22 and therefore the keyboard, to its highest position.

Although the invention has been described with reference to a specific example, it will be appreciated by those skilled in the art that the invention may be embodied in many other forms. For instance, the invention has been described with reference to structures suitable for right-hand operation when mounted under the operator's desk, but it should be clear that left-handed operation is equally possible and may be facilitated by mirror image construction. It is also feasible that dual-controls may be provided on either side of the structure, both or either of which may be used to control the movements. It should also be appreciated that the shapes of all the brackets and bodies need not be limited to those shown. Also the elongate members and rods need not have the cross section shown.



- 7 -

CLAIMS

1. (deleted)
2. (deleted)
3. (deleted)
4. (deleted)
5. (amended) A keyboard support apparatus comprising:  
a first bracket and a second bracket interconnected by first, second and third elongate members; said first and second elongate members are pivotally attached by means of a first pivot pin to said first bracket; said first elongate member is also pivotally attached by means of a second pivot pin to said second bracket; said third elongate member is pivotally attached by means of a third pivot pin to said first bracket; said second and third elongate members are adapted to co-operate with a fourth pivot pin associated with said second bracket, and said fourth pivot pin is adapted to releasably engage said second and third elongate members; the arrangement being such that, in use, one of the first and second brackets is connected to a supporting surface and the other to a keyboard, and the elongate members, when released from engagement with the second bracket, are moveable substantially in the same plane.
6. (new claim) A keyboard support apparatus as claimed in Claim 5 wherein:



- 8 -

the second and third elongate members each have a slot in which the fourth pivot pin resides, and the fourth pivot pin is threaded to adjustably co-operate with a manually operable nut to releasably clamp the second and third elongate members.

7. (amended and renumbered) A keyboard support apparatus as claimed in Claim 5 in which a first spring interconnects said third elongate member and said second bracket such that the first spring comes under greater tension when the second bracket is moved downwards with respect to the first bracket.

8. (amended and renumbered) A keyboard support apparatus as claimed in Claim 7 in which a second spring interconnects an overhang of the first bracket and the third elongate member such that the second spring comes under greater tension when the second bracket is moved downward with respect to the first bracket.

9. (amended and renumbered) A keyboard support apparatus substantially as herein described with reference to figures 3, 4, 5 and 6 of the accompanying drawings.



PCT/AU 7 / 0 0 2 8 9

RECEIVED - 8 JUN 1988

1/4

FIG. 1

SUBSTITUTE SHEET

PCT/AU 7 / 0 0 2 8 9  
RECEIVED - 8 JUN 1988

2/4

FIG. 2

SUBSTITUTE SHEET

3/4

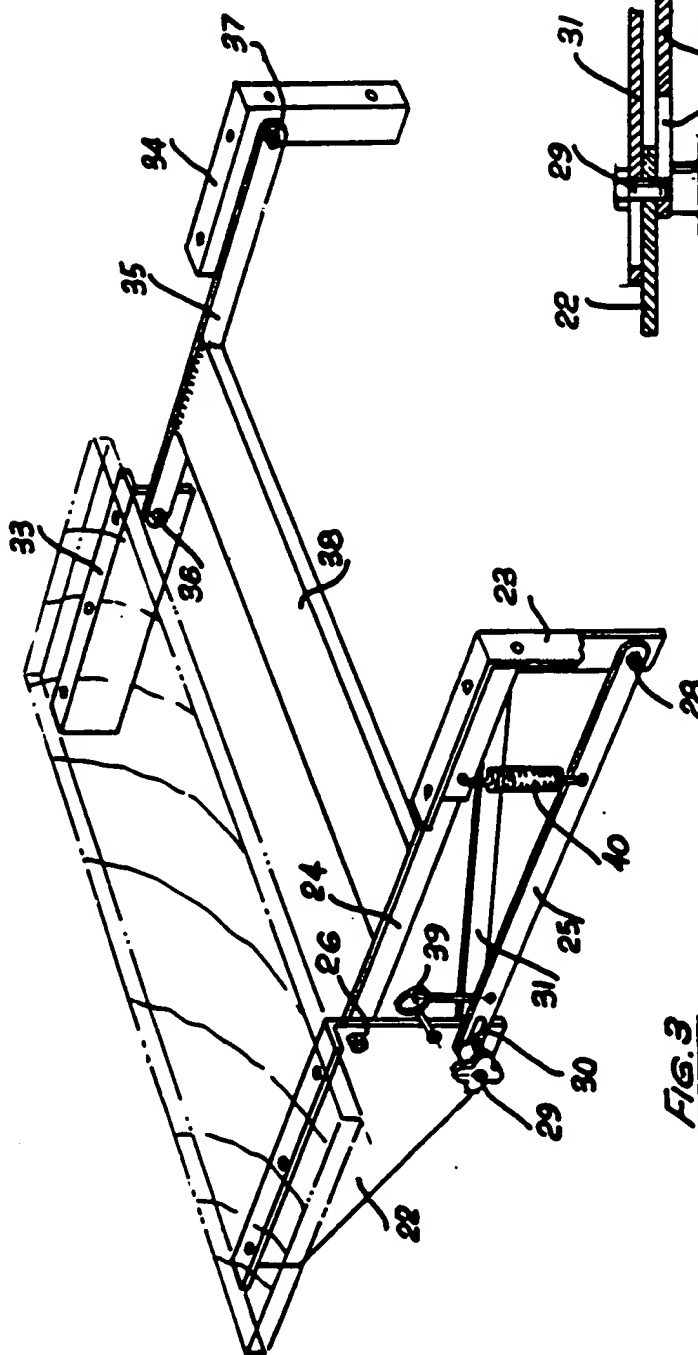


Fig. 3



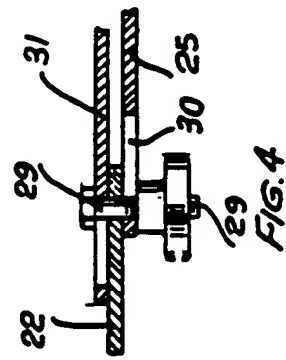


Fig. 4

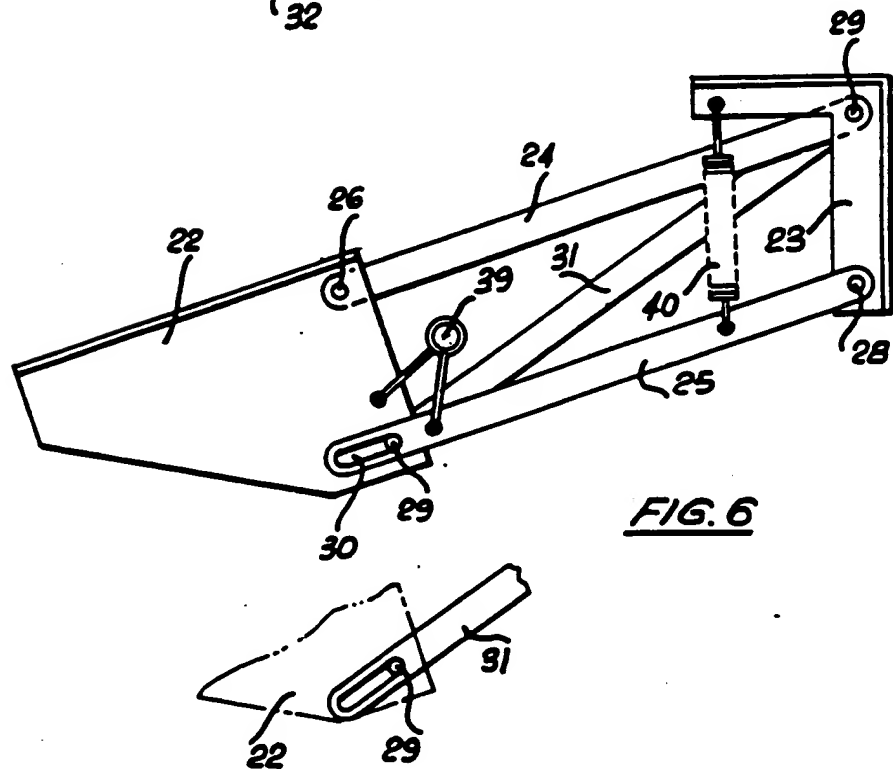

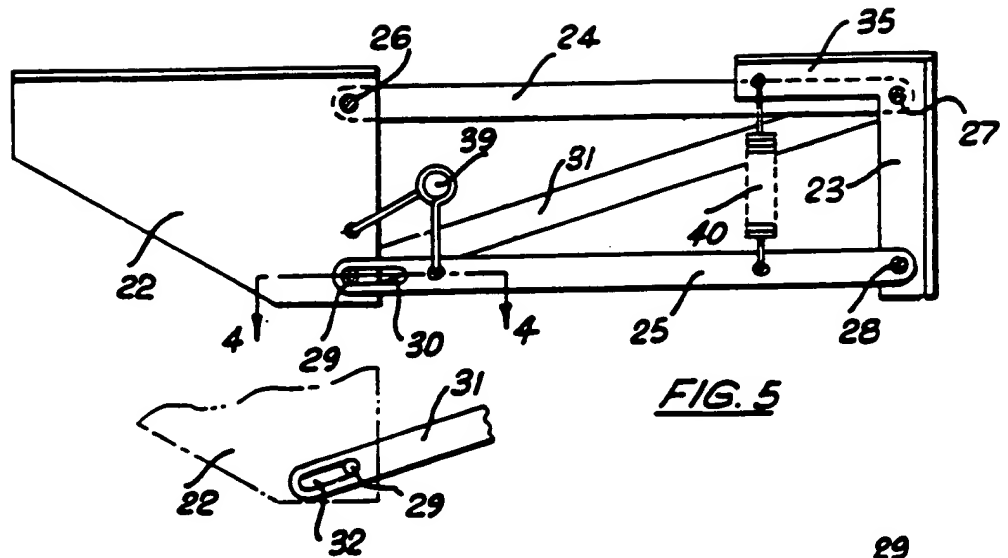

# INTERNATIONAL SEARCH REPORT

International Application No PCT/AU 87/00289

## I. CLASSIFICATION OF SUBJECT MATTER : (1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11) (12) (13) (14) (15) (16) (17) (18) (19) (20) (21) (22) (23) (24) (25) (26) (27) (28) (29) (30) (31) (32) (33) (34) (35) (36) (37) (38) (39) (40) (41) (42) (43) (44) (45) (46) (47) (48) (49) (50) (51) (52) (53) (54) (55) (56) (57) (58) (59) (60) (61) (62) (63) (64) (65) (66) (67) (68) (69) (70) (71) (72) (73) (74) (75) (76) (77) (78) (79) (80) (81) (82) (83) (84) (85) (86) (87) (88) (89) (90) (91) (92) (93) (94) (95) (96) (97) (98) (99) (100)

According to International Patent Classification (IPC) or to both National Classification and IPC

Int. Cl.<sup>4</sup> A47B 21/03

## II. FIELDS SEARCHED

Minimum Documentation Searched

Classification System

Classification Symbols

IPC A47B 21/03  
US Cl. 108/5, 108/138

Documentation Searched other than Minimum Documentation  
to the extent that such Documents are included in the Fields Searched

AU : IPC as above

## III. DOCUMENTS CONSIDERED TO BE RELEVANT

Category : 1. Citation of Document, 2. with indication, where appropriate, of the relevant passages 3. Relevant to Claim no. 10

P,Y	US,A, 4644875 (WATT) 24 February 1987 (24.02.87)	(1-8)
Y	US,A, 1662675 (INNES) 13 March 1928 (13.03.28)	(1-6)
Y	US,A, 4625657 (LITTLE) 2 December 1986 (02.12.86)	(1-9)
Y	US, 3866866 (KNEILE) 18 February 1975 (18.02.75)	(1-8)

- \* Special categories of cited documents: 10
- "A" documents defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another document or other relevant reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the prior art or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is compared with one or more other such documents, such comparison being deemed to a person skilled in the art.
- "Z" document member of the same patent family

## IV. CERTIFICATION

Date of the Actual Completion of the International Search

19 November 1987 (19.11.87)

Date of Mailing of the International Search Report

(30-11-87) 30 NOVEMBER 1987

International Searching Authority

Australian Patent Office

Signature of Authorised Officer

P. WARD

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON  
INTERNATIONAL APPLICATION NO. PCT/AU 87/00289

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Members			
US	3866866	AT	323934	DE	2261733
		SE	406261	YU	36423
				DK	140042

END OF ANNEX